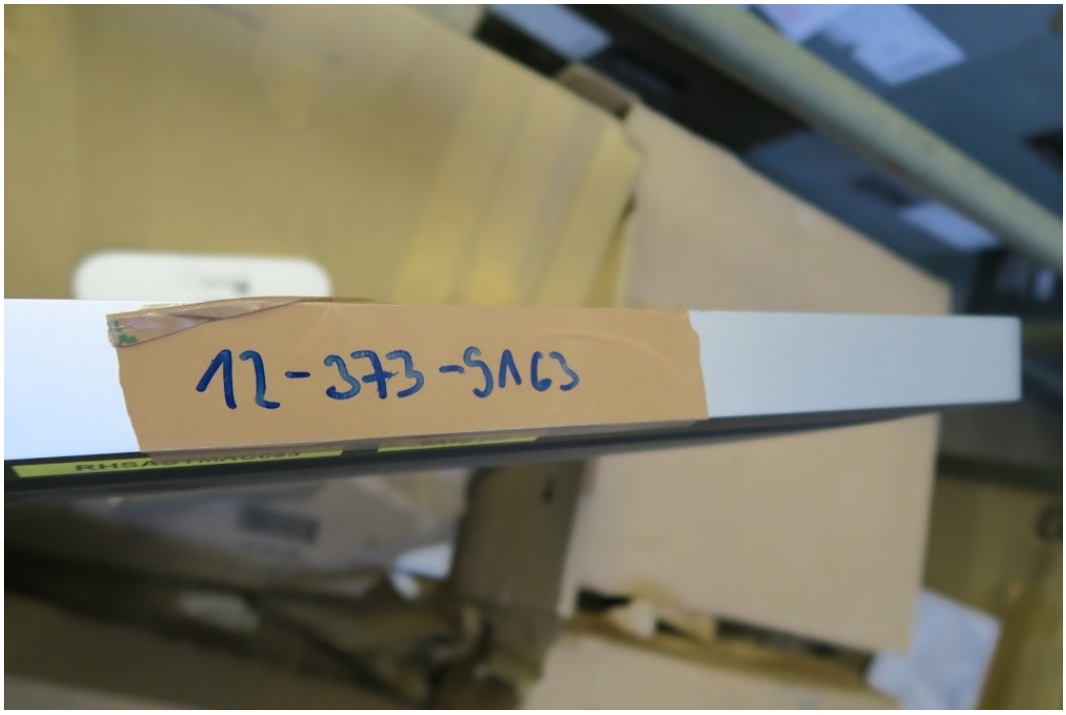
12-373-5A63

0984
LR45149
N122
Z844
Apple Inc. All rights reserved. 100-240V~, 50-60Hz, 3.0A Contains FCC ID: BCGA1115 IC: 579C-A1115
complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1) this device may not cause harmful
interference received, including interference that may cause undesired operation. Apparaten skall anslutas till jorda nätuttag.
Serial No: W8747 L7X8A
Mac24/2.4/2x1G/320/SD/WW/DEU
Contains:FCC ID:QDS – BRCM1024
Ethernet ID: 001863B7C3B9
Assembled in China
IC:4324A – BRCM1022
EMC No.: 2134
Model No.: A1225

CasaFan
WWW.VENTILATOR.DE
Standventilator
Pedestal fan
Greyhound
Type SV45-10-SL WE
240 V~ 50 Hz

Complies with the Canadian ICES-003 Class B specifications. EMC No.: 2010 Apparaten skall anslutas till jordat nätuttag.

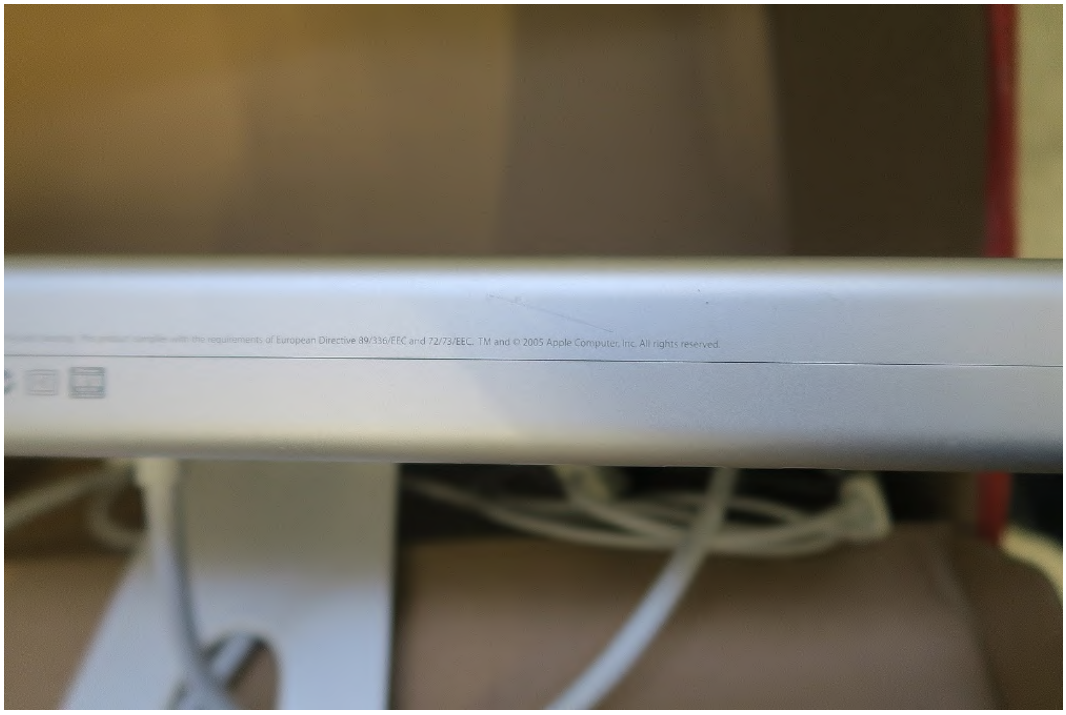
requirements of European Directive 89/336/EEC and 72/73/EEC. TM and © 2005 Apple Computer, Inc. All rights reserved.

Cinema HD Display 90W Power Adapter

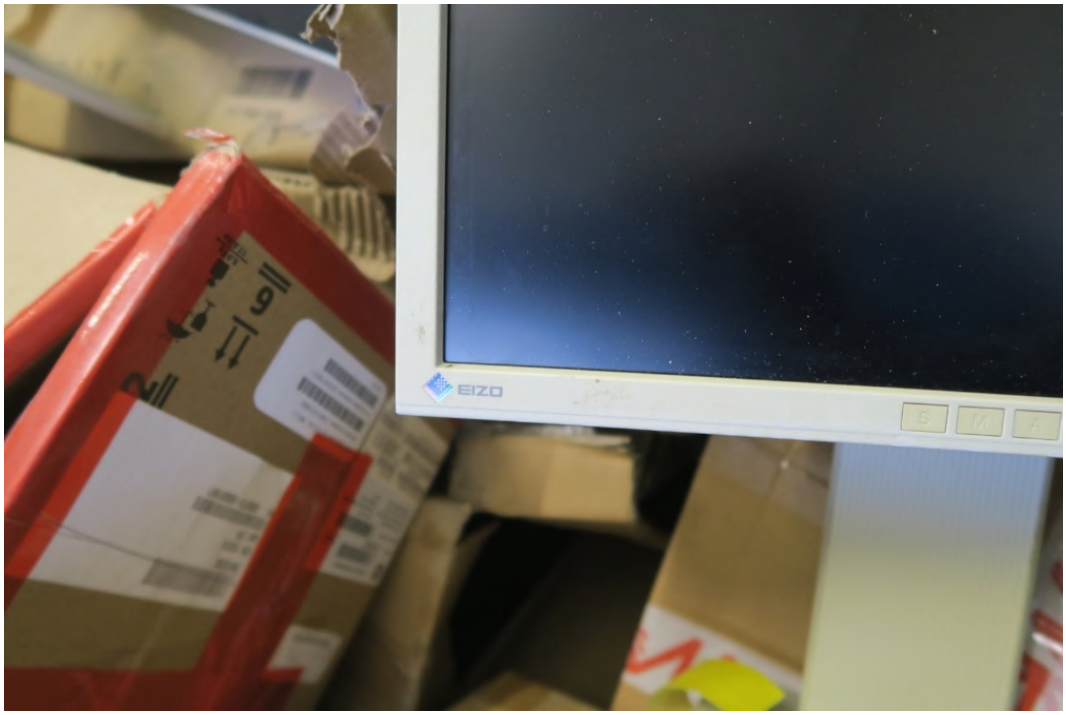
EIZO

POWER INPUT
FlexScan L768 (型号 : L768)
48 cm (19.0 inch) class Color LCD Monitor
Viewable Image Size 48.1 cm (18.9 inches)
48 厘米 (19.0英寸) 级彩色液晶显示器
48.1 厘米 (18.9英寸) 可视影像大小
FOR HOME OR OFFICE USE
100~120V / 200~240V ~ 50 / 60Hz 0.7A / 0.4A
EIZO NANAO CORPORATION
ACN 075 770 277
P/N OFTD0703 NNO
S/N D6129085 B
Mfd. AUGUST 2005
Follow local regulation or laws for safe disposal.
The backlight of the LCD panel contains mercury.
日本制造
Made in Japan

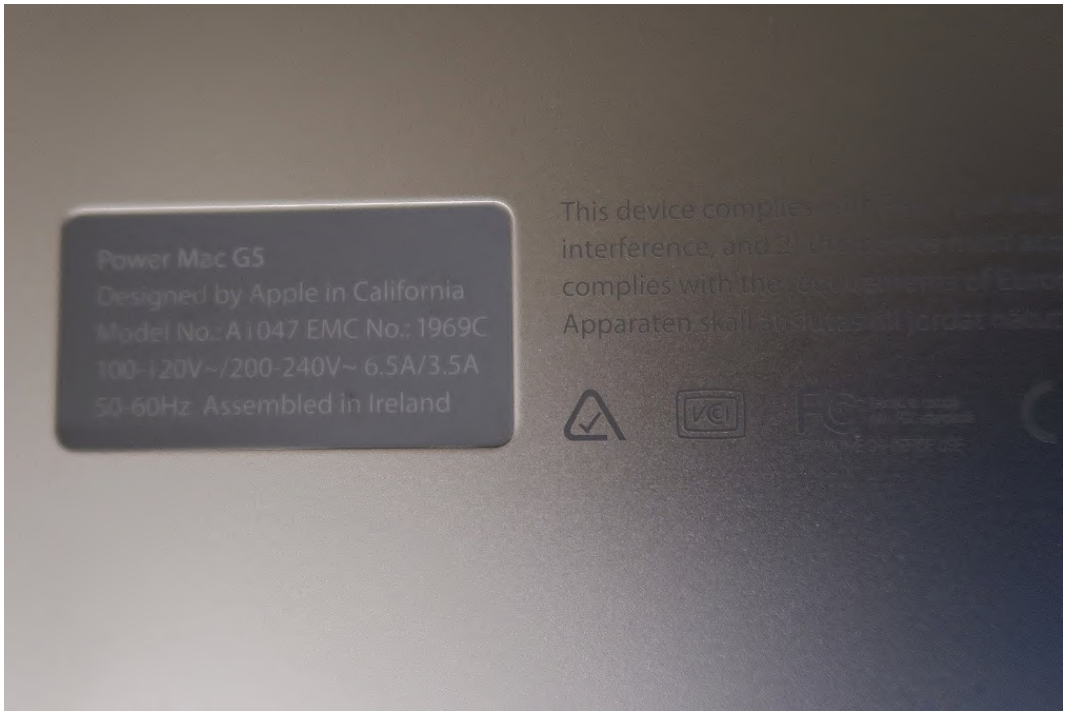
Power Mac G5
Designed by Apple in California
Model No.: A1047 EMC No.: 1969C
100-120V~/200-240V~ 6.5A/3.5A
50-60Hz Assembled in Ireland

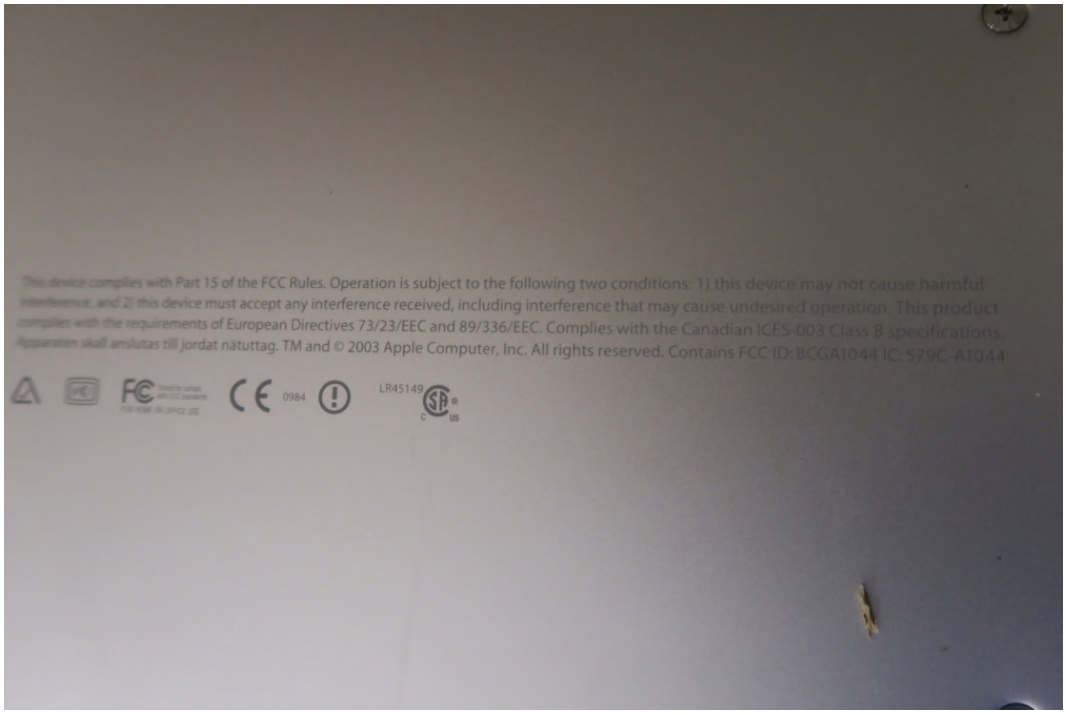
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation. This product complies with the requirements of European Directives 73/23/EEC and 89/336/EEC. Complies with the Canadian ICES-003 Class B specifications. Apparaten skall anslutas till jordat nätuttag. TM and © 2003 Apple Computer, Inc. All rights reserved. Contains FCC ID: BCGA1044 IC: 579C-A1044
0984
LR45149

EZ1 G4
SCANNER
2X
MICROTEK
1000XL Pro

BUND
Vers. Nr.:
7025-12-361-9692
D9460
VAN:
Datendarstellungsgruppe
EAS T41D-Y

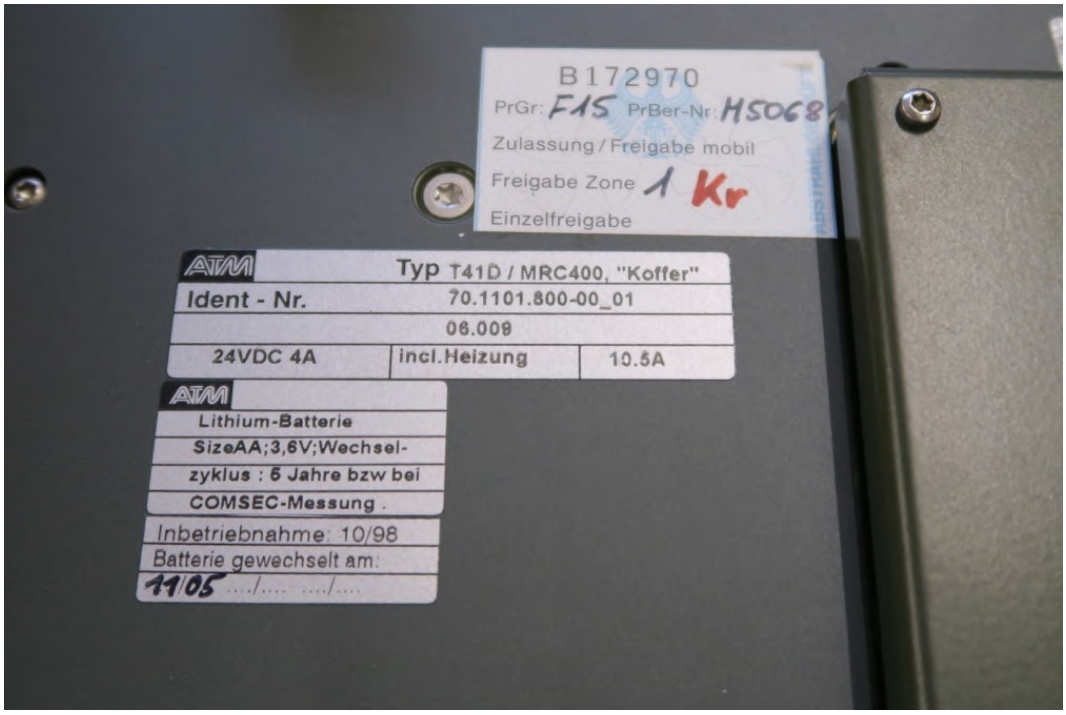
B172970
PrGr: F15 PrBer-Nr: H5068
Zulassung / Freigabe mobil
Freigabe Zone 1 Kr
Einzelfreigabe
ATM
Typ T41D / MRC400, "Koffer"
Ident - Nr. 70.1101.800-00_01
08.009
24VDC 4A
incl.Heizung
10.5A
ATM
Lithium-Batterie
SizeAA;3,6V;Wechsel-
zyklus : 5 Jahre bzw bei
COMSEC-Messung .
Inbetriebnahme: 10/98
Batterie gewechselt am:
11/05 ..../.... ..../....

MODEL
SERIAL No. 9711001
SUPPLY 24 FREQ. DC
TESTED
DATE

MANNESMANN TALLY
Mannesmann Tally GmbH D-7915 Elchingen
V~ 240 220 120
Hz 50 50 60
A 0,42 0,45 0,83
F1 T0,7A T1,2A
Model MT120I
Ser. No 0568635
Id. No 041224
W 100
Made in Western Germany

220 V
240 V
FUSE 0,7 AT
120 V
FUSE 1,2 AT

MANNESMANN
TALLY

TEMPEST/COMSEC
Windows® XP Professional
OEM Software
Microsoft
SN
60628756
Operating Range
10 - 30 VDC
3A
2001
PC727JP20055CW39
V1.2 11 0507
PC727xP2xxx5C
V2.6
E214940
SBS Technologies
Made in Germany

Vers.Nr.
Sach.Nr. 54.1019.192.00
Erz.St. 000 001 002 003
X-TERMINAL RE-DATVB
D1901
FN 1003
EADS
J3
J4
J5
J6
J7

EADS
J3
J4
J5
J6
J7

BUND

BUND
VNr.: 7025-12-327-7393
VAN: KOPPLER DIGITALDAT
Typ: GDK-200 A

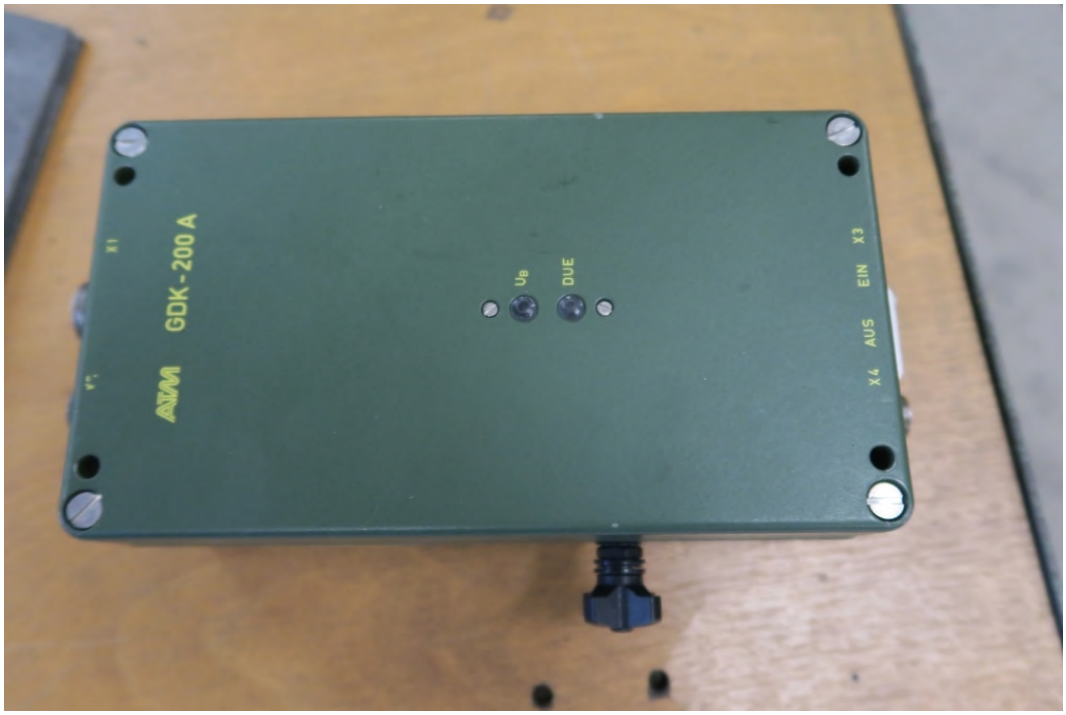
GDK-200 A
X1
X3
EIN
X4
AUS
DUE

MANNESMANN
TALLY

ENERTEC Schlumberger
M.T.U
PS 6024 / 43-1
32
Mod
01

RAZ ERR
INIT

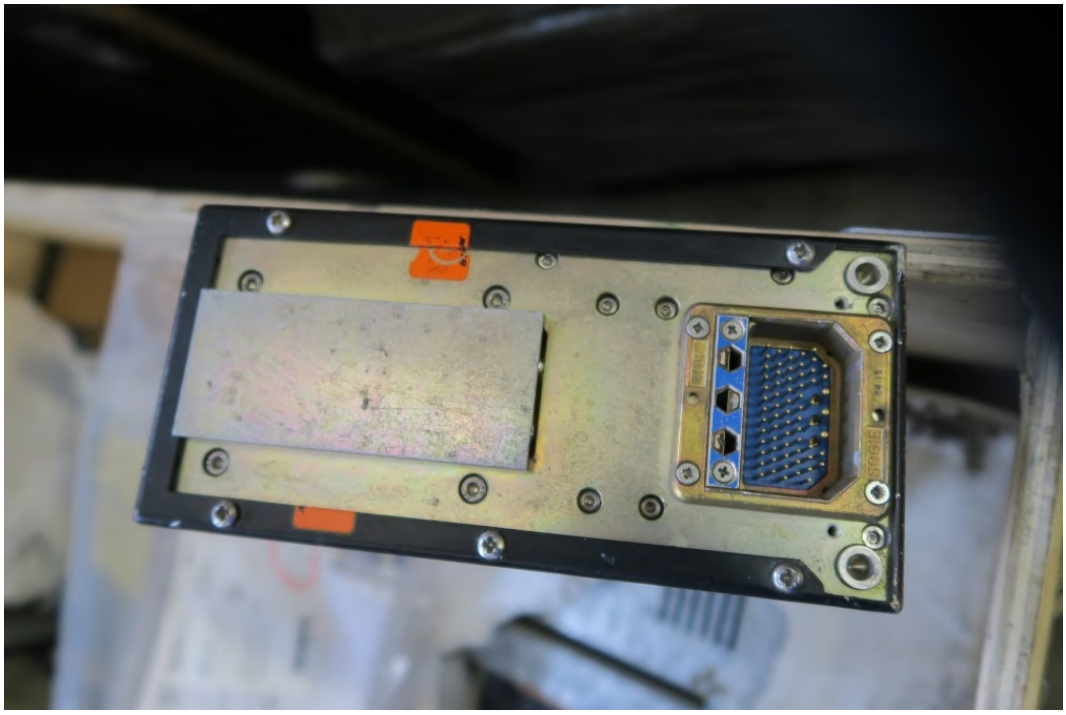

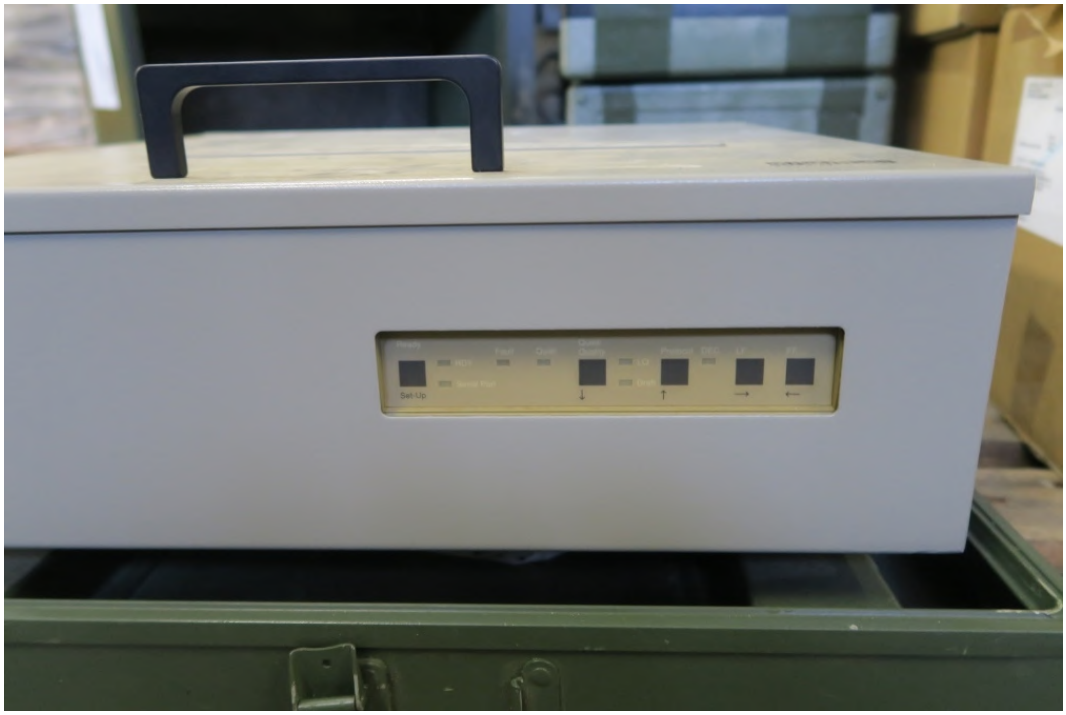

7025-12-333-2807
GAP
Drucker, M
Snr. : MU627HJ 244

Drucker
COMSEC
TÜV
Test FO-Umsetzer
Test Drucker
Test
Betrieb

6.3AT
1.6AT
230V~
REV.: 001
BUND
CE
TÜV
PRODUCT SERVICE
GS
COMSEC
B 096091
PrGr: F8
Freigabe Zone

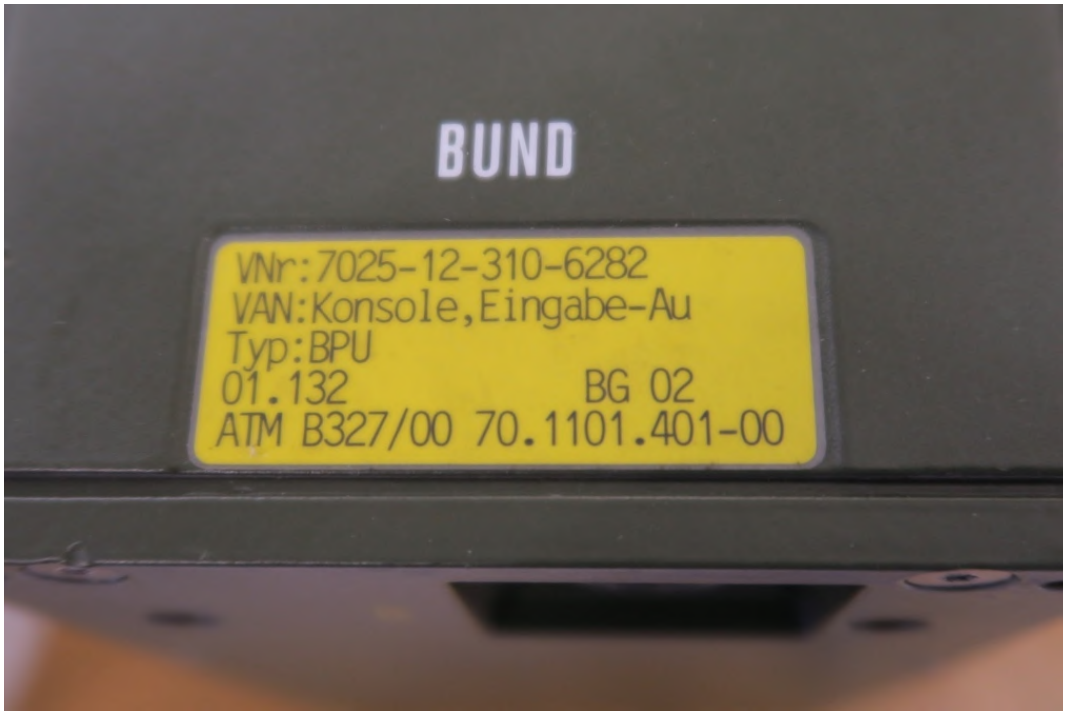
BUND
VNr:7025-12-310-6282
VAN:Konsole,Eingabe-Au
Typ:BPU
01.132 BG 02
ATM B327/00 70.1101.401-00

BPU
BITE
UB
GO
NOGO
LADEN
AUS/EIN
SPERRE
AUS
STOP
START

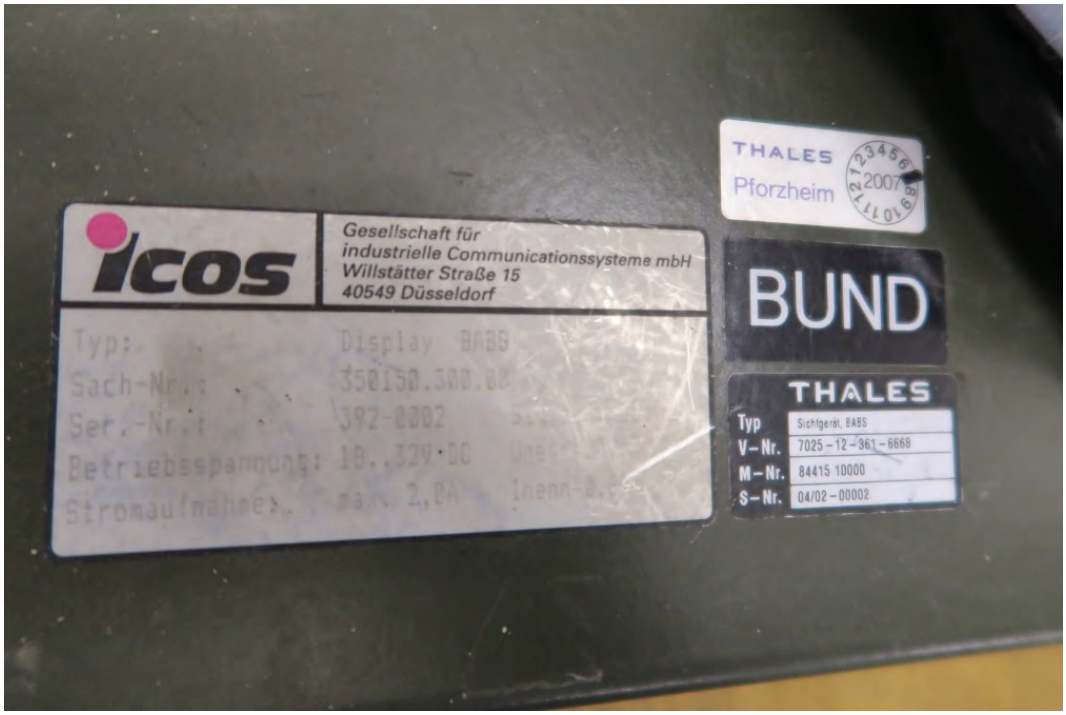
THALES
Pforzheim
2007
icos
Gesellschaft für
industrielle Communicationssysteme mbH
Willstätter Straße 15
40549 Düsseldorf
Typ:
Display BABS
Sach-Nr.:
Ser.-Nr.:
392-0002
Betriebsspannung:
Stromaufnahme:
BUND
THALES
Typ
Sichtgerät, BABS
V-Nr.
7025-12-361-6668
M-Nr.
84415 10000
S-Nr.
04/02-00002

F1
F2
F3
F4
F5
F6
F7
F8

roda
DP860 UX15
Input Rating: 19V = 2,5A
Touchscreen: DP5100
IP54
MIL-STD-810F
SN: D10014
Hersteller:
roda computer GmbH
Landstraße 6
D-77839 Lichtenau
Service:
roda computer GmbH
Bredenhop 20
D-32609 Hüllhorst
+49 5744-944-470
http://www.roda-computer.com

roda

Material-Anhänger ZK A,B,C
7035-12-342-1908
Entnahmekartei

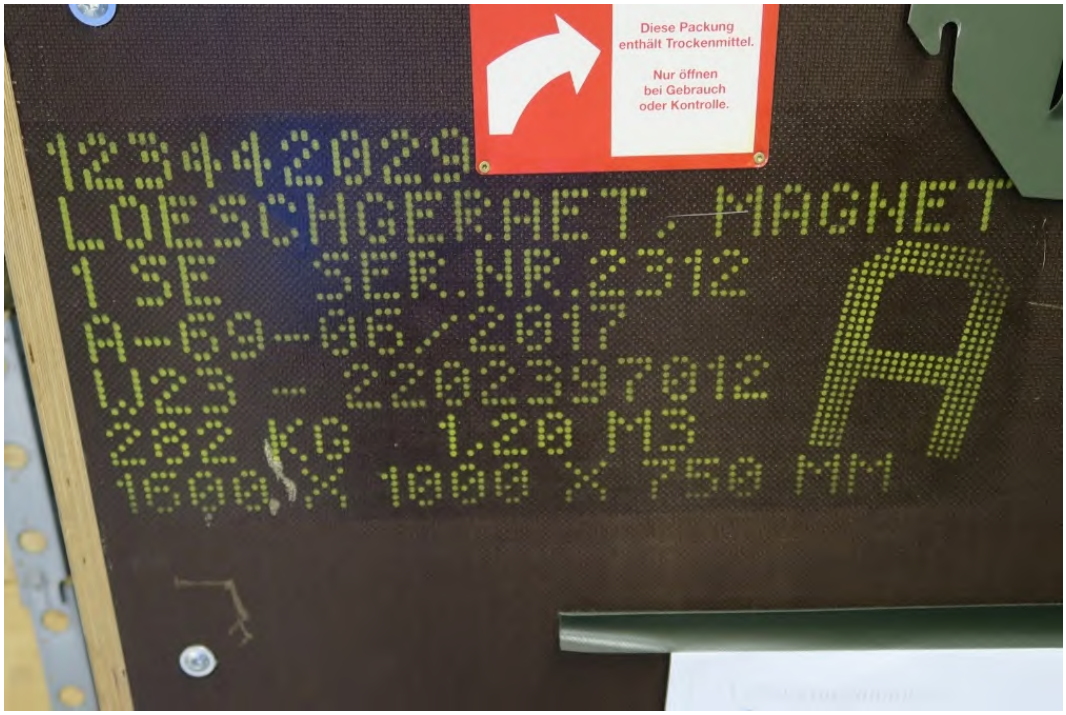
Diese Packung enthält Trockenmittel.
Nur öffnen bei Gebrauch oder Kontrolle.
LOESCHGERAET MAGNET
1SE SER.NR.2312
A-89-06/2017
U23 - 220237012
282 KG 1,20 M3
1600 X 1000 X 750 MM
A

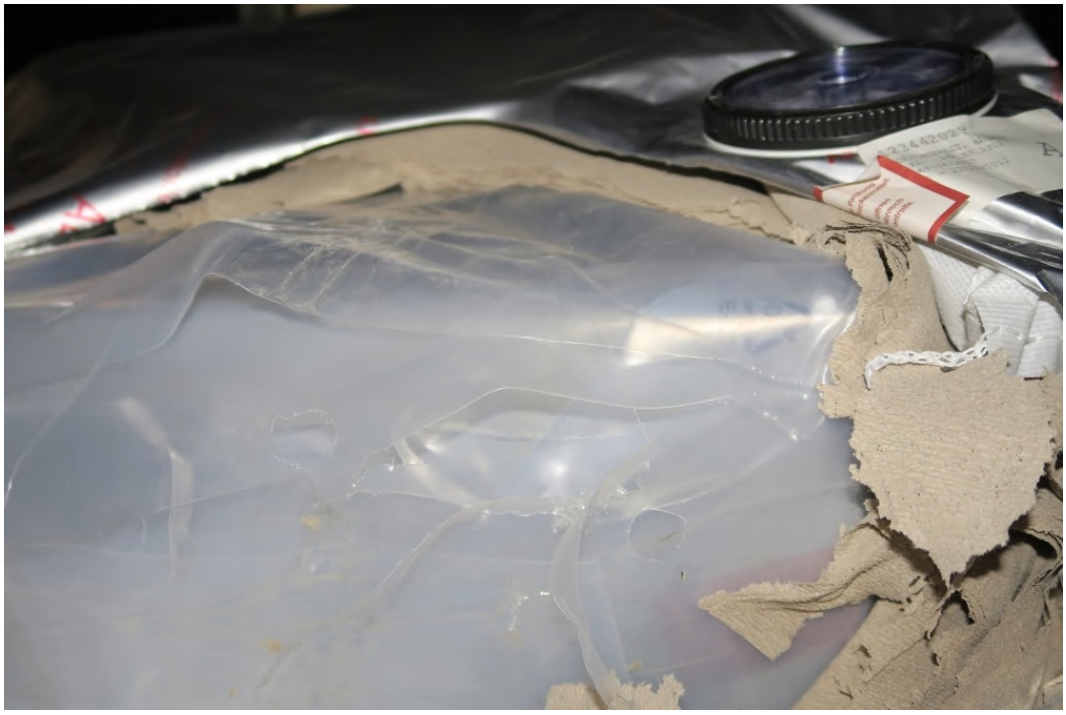

LOESCHGERAET, MAGNET
INSPEKTIONS-
FENSTER
12KS
9EA
XWD

roda
DP860 UX15
DC/IN
RGB
DVI
VGA
USB
USB

roda
DP860 UX15
Input Rating: 19V = 2,5A
Touchscreen: DP5100
Heater
IP54
MIL-STD-810F
SN: D10193
Hersteller:
roda computer GmbH
Landstraße 6
D-77839 Lichtenau
Service:
roda computer GmbH
Bredenhop 20
D-32609 Hüllhorst
+49 5744-944-470
http://www.roda-computer.com
RGB
DVI
VGA
USB

F1
F2
F3
F4
F5
F6
F7
F8

POWER
ON
ON
OFF
BIT 13 - 21 OKTAL
SY P S3
27 25
DATA
23 21 19 17 15 13 11 9
S2
TAG
7 6 3
S1 C
1
STORE TEST
DISPLAY
ON
OFF
INPUT
28V / DC
FUSE
1.6A
RECORDER-OUTPUT (BIT)
24 22 20 18 16 14 12 10 1
GND 23 21 19 17 15 13 11 9

DATENWORTEMPFÄNGER

POWER
ON
BIT 13 - 21 OKTAL
ON
OFF
28V / DC
FUSE
1,6A
SY P S3
27 25
DATA
23 21 19 17 15 13 11 9
S2
TAG
7 5 3
S1 C
1
STORE TEST
DISPLAY
ON
OFF
INPUT
RECORDER-OUTPUT (BIT)
GND